

WATER & BUILDINGS



THE PRESSURE REDUCING VALVE SPECIALIST

Safety valves and fittings for water applications

WHAT SETS GOETZE AND THEIR BUILDING TECHNOLOGY PRODUCTS APART



GLOBAL TRADE

Goetze products – available worldwide, directly and quickly. No matter whether through Goetze or our trading partners. Our sales subsidiaries and local dealers will always provide the advice you need to find the product that suits you best. Discover our dealer network and find your local dealer.



AVAILABILITY

We offer reliable availability of our standard products for the building technology sector. Products with standard settings and specifications can be shipped from the factory within 3 - 5 working days. This ensures that you receive your order reliably and on time.



RELIABLE COMPETENCE

Technical consulting is not the only focus of our in-house team. We provide support for our customers throughout the entire life cycle of the valve and assist those persons who have to work with the fittings every day by providing them with the necessary information and instructions. It is the task of our field representatives to provide our customers with the very best technical advice at the customer's premises to support them in all aspects related to our products.



ONLINE SERVICES

BIM data, 3D models or product navigator – Goetze offers various services online, so you can ideally integrate the products into your process already at the planning stage. In our online portal, you can download single data sets for individual nominal widths or an exclusive product range file for the series 9000, for example.



EASY INSTALLATION AND MAINTENANCE

Goetze building technology products are extremely easy to install. Thanks to standardised threaded or flanged connections, they can be installed in all conventional lines. The pressure reducing valves can be maintained and the safety valves relieved effortlessly in an installed position. New features, such as the transparent filter cup on the 9000, make it easy to detect the degree of soiling and thus determine any maintenance necessary required.

TECHNICAL BASICS

Materials

STAINLESS STEEL



- high-quality material
- corrosion-resistant
- for plants with particularly aggressive media

GUNMETAL



- robust and of high quality
- wide range of applications
- also available in a lead-free design

SPHEROIDAL GRAPHITE CAST IRON



- robust material
- cost-effective material for standard applications

BRASS



- good price/performance ratio
- cost-effective material for standard applications

Media

LIQUIDS



Temperatures:
-454 °F to +752 °F

- Pump protection
- Pressure boosters (water-side)
- Sprinkler systems
- Cooling circuits

AIR, GASES AND VAPOURS



Temperatures:
-454 °F to +752 °F

- Compressors
- Pressure vessels
- Pressure boosters (air-side)
- Silo container

STEAM



Temperatures:
+248 °F to +752 °F

- Steam
- Steam plants
- Sterilizers
- Autoclaves
- Boilers

HOT WATER



Temperatures:
up to +248 °F

- Heating systems
- Intrinsically safe solar plants
- Heating, ventilation
- Co-generation plants (CHP)

POTABLE WATER COLD



Temperatures:
up to +104 °F

- Domestic water supply
- Machines/systems with connection to potable water line
- Water utilities

POTABLE WATER HOT



Temperatures:
up to +185 °F / +203 °F

- Central potable water heater
- Process water heater
- Potable water tank


SOLAR PLANTS



Temperatures:
up to +320 °F

- Steam
- Steam plants
- Solar plants


Connections



Threaded connections
3/8" to 2"



3/8" - 2"

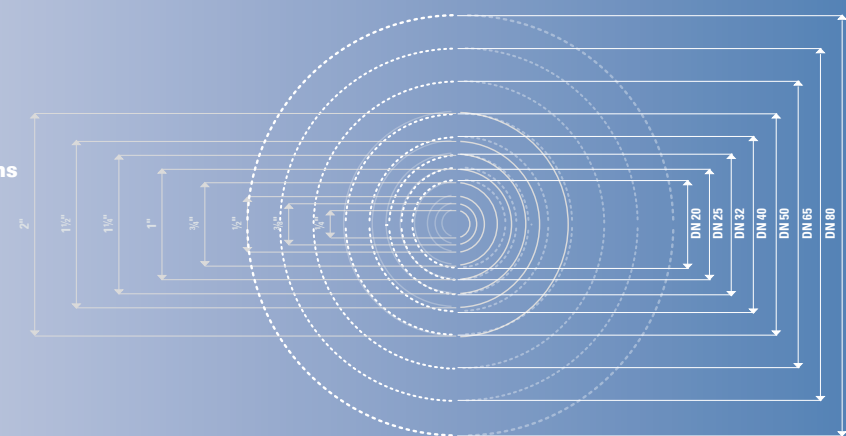

Flange connections
1/2" to 5"

1/2" - 5"



BUILDING TECHNOLOGY BY GOETZE

Tradition & innovation hand-in-hand

Driving new innovations and upholding tradition is never a contradiction in terms at Goetze KG. Since its founding in 1949, the fittings factory has manufactured heavy-duty gunmetal products for protecting plants using air, water and heating systems against overpressure or for reducing the inlet pressure to a required level. Gunmetal still plays a crucial role in products from Goetze KG – and is continuously optimised to ensure that market demands are ideally met. The development of the new pressure reducing valve, for example, focused on ensuring that the gunmetal used is environmentally compatible and compliant with potable water requirements. For this reason, the material used is lead-free to prevent lead from entering the recycling loop and therefore also fulfils requirements such as RoHS. For more than 70 years, the supply of valves for building technology applications has been a core area of Goetze KG's business. In addition to the building technology sector, under the leadership of Detlef Weimann,

the industrial valve business has been constantly developed and new solutions for customers and their plants have been found. In 2015, the product range was expanded to include safety fittings for cryogenic applications. Our aim is to perfectly fulfill customer requirements at all times. Despite our expanded business sectors, building technology is still one of our most important branches. No matter, whether valves for heating applications, pressure reducing valves, safety valves for solar applications or the safeguarding of fire extinguishing systems:



Goetze products can be found in many buildings today – from multi-storey buildings to single-family houses. Your safety is our top priority in every situation. Experience Goetze quality for yourself in our products and technical advice.



1975

today



1949

Founding
Gerhard Götze



1961

Move to the
Robert-Mayer-Straße



1988-2002

Goetze under the
direction of Rolf Götze



2002

D. Weimann acquires the
general partner's shares
and joins company as
managing director



2006-2009

Modernization of
manufacturing site



2010-2012

Building extension:
in-house casino,
training rooms



2015-2016

Founding of the
sales subsidiaries in
China and Russia




2019

70th anniversary and
founding of the sales
subsidiary in Brazil



2020

New product line
Goetze Competence
Centre Water &
Buildings

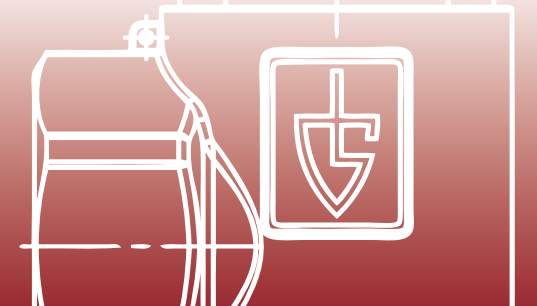

High-Performance valve and fittings

WE KNOW HOW TO HANDLE PRESSURE

NEW SUBSIDIARY IN AMERICA

Goetze KG continues its internationalization and opens a new subsidiary in Fort Mill, America. With **Goetze Valves NA Inc.** you have competent advisors for technical solutions with experience and professional know-how on site.

Since **1st September 2022**, our colleagues Filiz White and Jeff Hansen have been at work in America. They are the two heads of our sales office in the land of unlimited possibilities.

After opening subsidiaries in China and Brazil, Goetze KG Armaturen is now expanding its range of activities to America. The aim is to offer customers a smooth consulting service directly on site. Because a direct contact partner and **competent consultation** is not to be replaced, in order to offer to the customers, wholesalers and partners an ideal security of the plant.

Goetze also offers the complete product range for **safety valves, overflow and control valves, pressure reducing valves** as well as **hygienic valves** in America. These can also be installed in America variably and always ideally matched to the application. The safety valves are designed and manufactured in Ludwigsburg - made in Germany.

As our customer, you can trust in products that make no compromises in terms of **functionality, durability** and **resistance**. You can rely on that!



«For over 70 years, Goetze KG Armaturen has been manufacturing sophisticated high-performance valves and fittings for media under pressure: liquids, air, gases and vapours. For our family-run business the wishes and requirements of our customers are always the main focus, no matter whether you are looking for individual custom-made products or searching for solutions. With our experience and expertise we are the specialist and the right solution partner for you. Extensive tests, outstanding quality and international certifications are the successful pillars of the entire Goetze product range. With our family-run Goetze KG, you may always expect new and surprising things – based on our well-proven combination between innovation and tradition.»

Tobias Weimann & Detlef Weimann
Management, Goetze KG Armaturen

Professional and competent advice
Are you looking for suitable solutions for your plants?



Nora Rauch
Technical Sales
Phone: +1 (980) 2052418
n.rauch@goetze-valves.com

Filiz White
CEO
Phone: +1 (980) 422 3305
f.white@goetze-valves.com





WATER SUPPLY FITTINGS FOR THE BUILDING TECHNOLOGY SECTOR

Materials



Temperatures
from -4 °F to +248 °F



Pressures
from 7,25 psi to 145 psi
Inlet pressure up to 580 psi
Outlet pressures adjustable



Media



Threaded connections
from 3/8" to 2"



Flange connections
from 1/2" to 5"



Our pressure reducing valves with potable water approvals, both with threaded or flange connections do not only cover all classic areas of the water supply sector: They are often used for applications in sprinkler systems, in water-treatment or desalination plants. The materials of all wetted parts do not only fulfill the stringent national DVGW regulations but also those in France (ACS), the UK (WRAS) and Norway (SINTEF).

FITTINGS FOR BUILDING TECHNOLOGY ARE USED HERE:



Buildings



Potable water purification



Water systems



Sprinkler systems



Building services



Construction machinery



Safety showers



Irrigation systems

Series 9000

PRESSURE REDUCING VALVES SERIES 9000

made of lead-free gunmetal
with threaded connections



The first Goetze tap with functional parts made of plastic was developed for the environmentally and health-conscious user.

The lead-free body of the pressure reducing valve does not release any harmful substances into the drinking water and is corrosion-resistant in all water qualities. At the same time, the environment is protected by avoiding heavy metals.

The valve insert is made from a high-quality plastic used in medical technology and is resistant to cavitation, temperature and media. The flow rate of the pressure reducing valve has also been sized for maximum performance. A higher maximum flow rate is possible by optimising the flow and by using physical effects in the valve, a higher flow rate is possible with the same pressure drop.

The integrated 160 µm fine strainer insert protects the valve and downstream installation from dirt particles and is easy to clean without having to remove the valve insert and readjust the outlet pressure. The degree of contamination can be recognised through the transparent filter cup.

Another feature is the visible adjustment scale on both sides. This makes the setting process even more convenient by displaying the current set pressure in each position. This means that the setting can be made without a pressure gauge, special tools or operating pressure.



Temperatures
from +41 °F to +185°F



Inlet pressure up to 362,5 psi,
Outlet pressure adjustable from 7,25 psi to 174 psi



Threaded connections
from ½" to 2"

Series 9040

PRESSURE REDUCING VALVES SERIES 9040

made of stainless steel
with threaded connections



The 9000 series is also available in a modified version as the 9040 series made of stainless steel. The V4A stainless steel body does not release any harmful substances into the drinking water and is corrosion-resistant in all water qualities. The corrosion resistance is also sized for aggressive media.

The stainless steel version is used, for example, in systems in which food, cosmetics, beverages or other demanding media are processed.

The pressure reducing valve also features the easy-to-clean filter screen with transparent filter cup to protect the downstream system, the valve insert made of high-performance plastic and the setting scale visible on both sides.

For hot water and PN25 applications, a filter cup made of V4A is also available as an alternative.

In this case, the valve insert is also made entirely of plastic and the user benefits from all the advantages of the 9000 series as well as the properties of V4A stainless steel.



Temperatures
from +41 °F to +185°F



Inlet pressure up to 362,5 psi,
Outlet pressure adjustable from 7,25 psi to 174 psi



Threaded connections
from ½" to 2"



Washing facilities



Water systems



Industrial kitchens



Bottling plants



Two years, four heads and a great deal of expertise

New developments always involve a lot of time, patience and attention to detail. This of course is true in the case of our new pressure reducing valve series 9000. A team of experts from our water control division has been working meticulously on this innovation for two years. 58 tools for the production of cast-, plastic- and elastomer parts and many man-hours later, Goetze is able to present an innovative product in its range to protect the potable water supply. This requires compliance with special standards in order to guarantee clean and safe potable water at all times. The development was characterised by various project phases. Firstly, concepts were developed optimised and validated using modern simulation software. Once the parts had been designed, the very latest technology was employed to create the prototypes. The first parts, which were directly subjected to flow and strength tests, were manufactured using the metal 3D printing technique. This means that right from the start maximum resistance can be verified and guaranteed. After fatigue- and production part tests, we now have a new product that stands for maximum operational safety, simple maintenance and a high degree of convenience.



Functions ideally supported by an innovative design

Goetze is exploring new avenues not only in product development but its products are constantly advancing in terms of design as well. The pressure reducing valve sets itself apart, above all, through an integrated filter, a conveniently-shaped adjustment handle and a clearly arranged scale for setting the desired outlet pressure. Goetze is also breaking new ground in the field of materials. For the very first time, the company is making extensive use of plastics, the transparent filter cup, for example, being made exclusively of high-quality plastic.

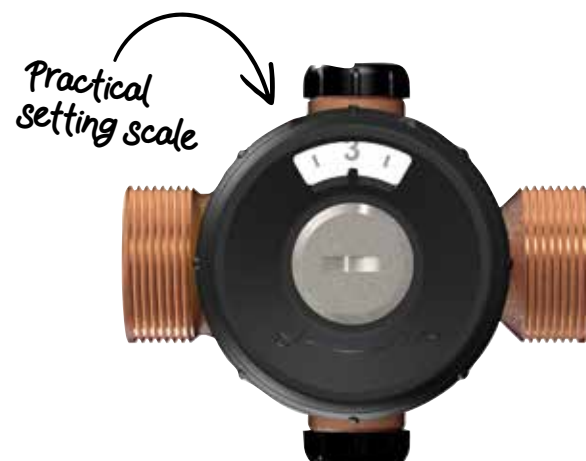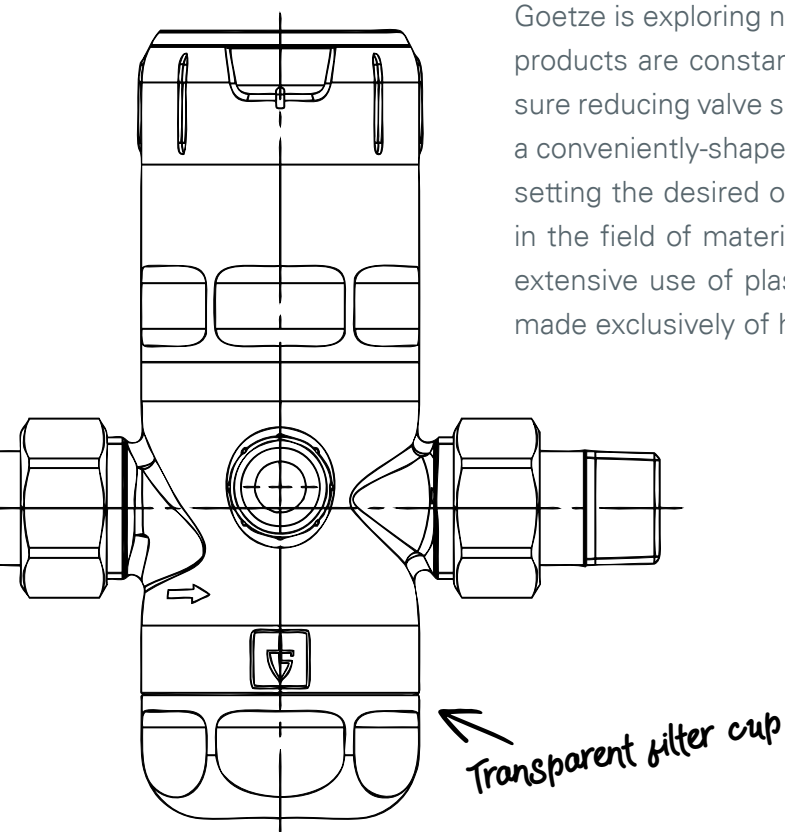

Transparent filter cup

Offering even more benefits through plastic

The new pressure reducing valve consists of a combination of materials unique for Goetze. As with numerous other products, the housing is made of gunmetal. Which is lead-free and offers the highest possible corrosion resistance.

The elimination of lead offers further benefits: The environment is sustainably protected by the avoidance of heavy metals and future-proof recyclability is possible.

The use of selected plastics from medical technology, however, is new: for such components as the spring housing, the adjustment handle as well as in the filter cup and associated filter. The valve insert is even made of a plastic that is mainly used in medical technology.

The materials used set themselves apart in particular through high strength, hardness and rigidity even at high temperatures. In addition, plastics suffer little

to no cavitation at all. But there is also enormous creative leeway in terms of the design itself. You benefit, for example, from the high degree of transparency that allows soiling to be detected quickly and the pressure reducing valve to be maintained accordingly.

By expanding the material combination, the user benefits from the positive properties of the plastic without having to forego the usual quality for which Goetze KG is known.



High-quality plastics
For conveying media in the medical technology sector



Transparent filter cup
In transparent for detecting the degree of soiling

Lead-free gunmetal RG+

The lead-free gunmetal RG+ is the result of consistent development from the lead-containing gunmetal RG 5 lead-reduced CuSn5Zn5Pb2-C, which has proven itself for years. It is the preferred material for drinking water installations.

Inside the microstructure, lead has been substituted by sulphur, however it has no effect on the basic properties such as excellent corrosion resistance, tensile strength, elongation, hardness and machinability.

The new RG+ material was extensively tested in the laboratory and over several years in the field. The alloy is standardised by DIN SPEC 2701 and part of the Federal Environment Agency's positive list of metallic materials suitable for drinking water hygiene since 2018.

As well as for the conventional gunmetal, a high tin content in the new alloy ensures the optimum coating structure. In addition to high corrosion resistance it also guarantees long-term safety.

Therefore, the lead-free gunmetal RG+ can be used in all water qualities according to the drinking water ordinance and according to all drinking water-related standards in Europe without any restrictions.

The material has excellent hygienic properties. With a maximum lead content of 0.10% the requirements of national and international legislation, such as for the US are met and is also compliant to the REACH regulation, and will certainly meet future material requirements as well.



Lead-free gunmetal housing



Lead-free gunmetal
Safe, environmentally-friendly, corrosion resistant

Fittings for water supply and building technology sector

PRESSURE REDUCING VALVES
SERIES 382

made of spheroidal graphite cast iron, with flange connections



The 382 pressure reducing valve is used in a wide variety of water applications. Whether in apartment blocks, office complexes, hospitals or hotels - it regulates the pressure perfectly wherever large quantities of water are required. Thanks to its low pressure drop, the pressure reducing valve 382 is even used in municipal water supplies.

Only high-quality, approved materials are used for the 382 pressure reducing valve. Thanks to its spheroidal graphite cast iron body, the 382 pressure reducing valve is ideally equipped to withstand the mechanical stresses of the installation.

Its high-quality polyamide coating, which is applied by dipping, offers maximum corrosion resistance - even against seawater and abrasive water.

The valve insert made of V4A stainless steel can be removed quickly and easily for maintenance.

The flanged pressure reducer is equipped with an adjustment scale in the bonnet for easy back pressure adjustment without operating pressure.

	Temperatures from +41 °F to +149 °F
	Inlet pressure up to 362,6 psi, Outlet pressure from 7,25 psi to 174 psi
	Flange connections from 2" to 5"

PRESSURE REDUCING VALVES
SERIES 9160

made of brass, with threaded connections



The 9160 series - the smallest water pressure reducing valve in the Goetze portfolio.

These mini pressure reducing valves in nominal diameter 1/4" are used particularly in applications such as coffee machines, water dispensers or soft drink dispensers with a fixed water connection. The small size is particularly important here, as the pressure reducing valve is often integrated into the body of the appliance.

In flat water installations, the mini pressure reducing valve is often used in nominal diameters 1/2" and 3/4".

The integrated filter screen protects the appliance and the installation from particles and impurities. An adjustment scale in the bonnet allows pressureless presetting with a screwdriver.

Nominal diameters 1/2" and 3/4" can be installed with optionally available fitting screw connections. Alternatively, they can also be installed directly using female threads.

The body is made of dezincification resistant brass, also available in lead-free brass on request. Fitting screw connections and pressure gauges are available as accessories.

	Temperatures from +41 °F to +140 °F
	Inlet pressure up to 232 psi, Outlet pressure from 7,25 psi to 174 psi
	Threaded connections from 3/8" to 3/4"

PRESSURE REDUCING VALVES
SERIES 481 AND 681

made of stainless steel and gunmetal, with threaded connections



The tried and tested, robust pressure reducing valves in full-metal construction with screw connections have proven themselves not only in the drinking water sector, but especially in harsh operating conditions in the industrial sector for a wide range of media, including aggressive media and at fluctuating ambient temperatures.

The materials are optimised for a wide range of water qualities and hot water applications. In addition to the standard pressure range of 14,5 psi to 116 psi, the additional 7,25 to 29 psi and 72,5 to 217,5 psi back pressure ranges cover a wide range of applications.

Optionally available with female thread.

	Temperatures from -4 °F to +248 °F
	Inlet pressure up to 580 psi, Outlet pressure adjustable from 7,25 psi to 217,5 psi
	Threaded connections from 1/2" to 2"

PRESSURE REDUCING VALVES
SERIES 482 AND 682

made of stainless steel and gunmetal, with flange connections



Flange connections are often required for fittings. These series are available in the nominal diameter range from 1/2" to 4" for precisely this purpose. In addition to the standard version, there is also a high-pressure and a low-pressure version for these pressure reducing valves made of stainless steel and gunmetal in the nominal diameters 3/4" to 2".

On request, we can also equip the stainless steel pressure reducing valves with stainless steel pressure gauges for the various pressure ranges.

For maximum ease of maintenance, the exchangeable functional cartridge with strainer is also available for the flange versions.

	Temperatures form -4 °F to +248 °F
	Inlet pressure up to 580 psi, Outlet pressure adjustable from 7,25 psi to 217,5 psi
	Flange connections from 1/2" to 4"

SAFETY VALVES WITH
DIAPHRAGM SERIES 651MW

made of gunmetal, angle type, with threaded connections



651mWNC enlarged outlet (TÜV/CE)
651mWIK with inlet and outlet
diameter equal


Particularly in the case of valves which are employed in potable water installations, we do not accept any compromises regarding the materials used. Only the highest quality materials suitable and approved for potable water applications are used in these valves. These types of safety valves with diaphragm are installed in the cold water pipe before the hot water heater to protect it from inadmissible overpressure.

	Temperatures from +14 °F to +203 °F
	Pressures from 43,5 psi to 145 psi
	Threaded connections from 1/2" to 1 1/4"

Pressure reducing valve – simply explained

Assembly instructions are also available as a video

Pressure reducing valve – Installation, maintenance and function simply explained with our assembly video. See how the pressure reducing valve is fitted in a line with threaded connections and how it then works. With a fascinating view into the valve itself and flow graphics.

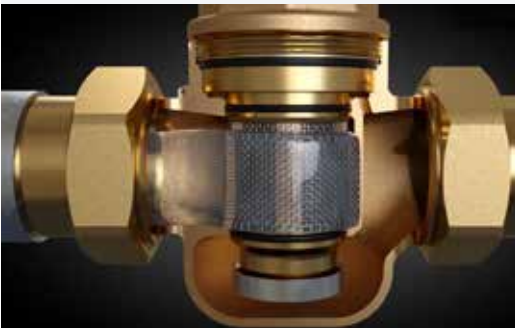

Watch the pressure reducing valve video now!



DVGW-CERTIFIED SAFETY VALVES FOR DRINKING WATER APPLICATIONS

Materials



Temperatures
from -76 °F to +752 °F



Pressures
from 7,25 psi to 1015 psi

Media



Threaded connections
from 1/4" to 2 1/2"



Flange connections
from 1/2" to 4"



Our DVGW-certified safety valves for drinking water applications ensure reliable protection in sensitive water systems. They reliably prevent overpressure and thus ensure the safety and longevity of drinking water systems. Due to the high quality and precision of Goetze safety valves, they meet all the relevant requirements and offer an optimal solution for the safe operation of drinking water installations.

FITTINGS FOR BUILDING TECHNOLOGY ARE USED HERE:



Drinking water distribution



Water treatment

DVGW-certified safety valves for drinking water applications

SAFETY VALVES
SERIES 455bGFL

made of stainless steel, in angle type with flange connections




The 455 series of flanged safety valves offers a consistent concept in performance, function and design – ideal for drinking water applications.

With nominal diameters from ½" to 4", it covers a wide range and offers high media resistance thanks to high-quality materials.

The optional bellows ensures improved tightness to the atmosphere and prevents any media leakage.

With a pressure range of 2,9 to 580 psi, this valve is versatile and robust, optimal for safe use in demanding drinking water installations.

 **Temperatures**
from -76 °F to +752 °F*

 **Pressures**
from 2,9 psi to 580 psi

 **Flange connections**
from ½" to 4"

SAFETY VALVES
SERIES 852bFL

made of gunmetal, in angle type with flange connections



The high-performance safety valves in the 852 series, made of gunmetal with bellows, are suitable for drinking water applications and for protecting systems that have to withstand high temperatures.

The metallic bellows protect moving parts from deposits, while the spring chamber and spring are protected from moisture and high temperatures – ideal for demanding applications in drinking water systems with temperature loads.

 **Temperatures**
from -76 °F to +437 °F

 **Pressures**
from 7,25 psi to 363 psi

 **Flange connections**
from 1½" to 2"

SAFETY VALVES
SERIES 451

made of stainless steel, in angle type, with threaded connections




High-performance safety valves made of stainless steel with bellows for protecting non-intrinsically safe solar heating systems with temperatures up to over 752°F, as well as for district heating supply systems, steam boilers and pressure vessels.

The metal bellows protect sliding and moving parts from the medium and thus from dangerous deposits. The spring chamber and spring are protected from penetrating steam and high temperatures.

 **Temperatures**
from -76 °F to +752 °F

 **Pressures**
from 7,25 psi to 1015 psi

 **Threaded connections**
from ½" to 2"

*depending on the design, on request down to -270°C

SAFETY VALVES
SERIES 851

made of stainless steel, in angle type, with threaded connections




A proven series of safety valves for drinking water applications in a compact design. With its excellent price-performance ratio, it has been providing reliable protection for years.

In addition to the flexible basic versions, the valve can be individually adapted to the requirements of the drinking water installation thanks to various sealing materials and designs.

These valves are optionally available with special features such as metallic bellows and a gastight spring bonnet, which enable safe use in a wide range of applications – always in compliance with the strict hygiene requirements for drinking water.

 **Temperatures**
from -76 °F to +437 °F

 **Pressures**
from 7,25 psi to 725 psi

 **Threaded connections**
from ½" to 2"

SAFETY VALVES
SERIES 460tGFL


made of stainless steel, in angle type, with threaded connections




This versatile safety valve made of 316 stainless steel is suitable for drinking water applications where maximum corrosion resistance and reliability are required.

It offers outstanding quality despite its compact design and is available in a flexible version with or without lifting device.

The gas-tight bonnet ensures a reliable seal, so that the valve can also be used in sensitive applications with the highest hygiene standards.

 **Temperatures**
from -76 °F to +437 °F

 **Pressures**
from 2,9 psi to 363 psi

 **Threaded connections**
from ⅜" to 1"

SAFETY VALVES
SERIES 461tGFO

made of stainless steel, in angle type, with threaded connections



The 451 series extends the safety valve options to include smaller nominal diameters and is specially designed for applications with lower flow rates in the drinking water sector.

With a wide range of variants, the valve can be configured for a wide range of requirements, making it ideal for smaller drinking water installations and applications with sensitive hygiene requirements, such as in medical devices or in the beverage industry.

 **Temperatures**
from -76 °F to +437 °F

 **Pressures**
from 7,25 psi to 1015 psi

 **Threaded connections**
from ¼" to ½"





DVGW-certified safety valves for drinking water applications

SAFETY VALVES
SERIES 642 / 645mGFL

made of gunmetal, in angle type, with threaded and flange connections



For larger static heights, pressure boosting systems are often required in drinking water installations. Thanks to its approval and suitability for drinking water, the pressure vessel, which is operated with water and an air cushion, can be reliably protected with a safety valve from the 642 and 645 series from Goetze. This ensures that the pressure always remains within safe limits and that the drinking water installation is optimally protected.




	Temperatures from -58 °F to +401 °F
	Pressures from 7,25 psi to 232 psi
	Threaded connections from ½" to 2 ½"
	Flange connections from 1" to 2 ½"

SAFETY VALVES
SERIES 6420 / 6450mGFL

made of gunmetal, in angle type, with threaded connections



Pressure boosting systems are often necessary for larger static heights in drinking water installations. The safety valves of the Goetze series 6420 and 6450 offer reliable protection and, thanks to their approval, are particularly suitable for use with drinking water. They are characterised by a high degree of connection flexibility, and the medium-contacting internal parts made of stainless steel ensure hygiene and corrosion resistance - ideal for long-term use in sensitive drinking water applications. The 6420 and 6450 series can be equipped with loose flanges depending on availability. This facilitates both integration into existing systems and the replacement of existing valves.




	Temperatures from -58 °F to +401 °F
	Pressures from 7,25 psi to 232 psi
	Threaded connections from ½" to 2 ½ "

SAFETY VALVES
SERIES 652mFK

made of gunmetal, full-metal construction, angle type with threaded connections



The diaphragm safety valve in the 652mFK-EPDM series is particularly suitable for protecting closed drinking water circuits. Made of corrosion-resistant gunmetal in a full-metal construction, it fulfils the strict hygiene requirements in drinking water systems and offers unbeatable value for money. These safety valves are ideally suited as a standard solution in drinking water installations and systems with high aseptic requirements.

	Temperatures from -58 °F to +302 °F
	Pressures from 1 bar to 232 psi
	Threaded connections from ½" to 2"

SECURING THE DRINKING WATER DISTRIBUTION WITH SAFETY VALVES FROM GOETZE

In drinking water distribution, protection against overpressure is of crucial importance for reliably protecting the infrastructure and water quality in supply networks. Particularly in urban water networks and large building complexes, efficient protection against high pressure fluctuations is necessary to protect pipes, connections and devices and to maintain the aseptic quality of the drinking water.

In drinking water systems, the pressure is often regulated by pressure reducing valves, which are installed in so-called pressure transfer shafts. These systems reduce the network pressure to a safe level that is suitable for further distribution. However, even the best pressure control is not always able to fully absorb sudden pressure peaks, for example due to unforeseen pump failures or sudden changes in the water network. This is where Goetze safety valves come in, providing a reliable addition to pressure transfer chambers.

Goetze safety valves, including the 851, 6420, 455 and 852 series, offer comprehensive overpressure protection and are specially designed for the requirements of drinking water distribution. All these valves have DVGW certification and meet the strict hygiene requirements of the UBA (German Federal Environment Agency) directives, ensuring impeccable water quality.

With Goetze safety valves, drinking water distribution has a reliable partner for maximum safety and hygiene in water supply. This effectively protects the drinking water network from pressure damage, increases security of supply and maintains water quality in the pipes.





TÜV/CE SAFETY VALVES FOR HEATING AND COOLING

Materials



Temperatures
from -58°F to +302°F



Pressures
from 7,25 psi to 362,6 psi

Media



Threaded connections
from ½" to 2"



Flange connections
from ½" to 4"

The product range is designed for hot water and heating systems as well as for cooling and air conditioning systems in single homes and multidwelling buildings and large building complexes. As an example, the safety valves for such installations are fitted with special sealing materials, which are suitable for glycol concentrations of up to 100%. A maximum degree of safety is of paramount importance when we develop new products. Even for combined plants, so-called „Combined Heating and Cooling Systems“, safety valves with the necessary approvals are available from our product range.

TÜV/CE SAFETY VALVES FOR HEATING AND COOLING ARE USED HERE:



Heating systems



Combined heat and power plant modules



Building cooling systems



Large-scale heating systems

TÜV/CE safety valves for heating and cooling

SAFETY VALVES SERIES 651mH

made of gunmetal, all-metal construction,
angle type with threaded connections



651mHNK with enlarged outlet (TÜV/CE)
651mHIK with inlet and outlet diameter equal

Robust safety valve with diaphragm with an all-metal constructi-
on. Designed to protect hot-water- and heating-systems. This un-
matched design, which does not have any plastic parts, means that
these valves are also suitable for very high external temperatures.



Temperatures
from +14 °F to +248°F



Pressures
from 36,3 psi to 43,5 psi



Threaded connections
from ½" to 2"

SAFETY VALVES WITH BELLOWS SERIES 451bH

made of stainless steel, angle type
with threaded connections



For demanding requirements in hot-water and heating-systems,
there is also a version available made of high-quality corrosion- and
acid-resistant stainless steel.

This valve is suitable for all hot- water systems, where protec-
tion cannot be achieved by using a standard safety valve with
diaphragm with the standard set pressures of 36,3 or 43,5 psi, for
example in the case of all large building complexes.



Temperatures
from +14 °F to +248°F



Pressures
from 7,25 psi to 362,6 psi



Threaded connections
from ½" to 2"

SAFETY VALVES WITH BELLOWS SERIES 851bH

made of gunmetal, angle type
with threaded connections



High performance safety valve with bellows, made of high quality,
corrosion-resistant gunmetal. Heating systems with set pressures
other than 36,3 or 43,5 psi are required to be protected by such
safety valves.

Apart from indirectly heated plants, the sizing of the valves is
based on the heating output of the boiler.



Temperatures
from +14 °F to +248°F



Pressures
from 7,25 psi to 362,6 psi



Threaded connections
from ½" to 2"

SAFETY VALVES WITH BELLOWS SERIES 852bHL

made of gunmetal, angle type
with flange connections



This safety valve series consists entirely of corrosion-resistant
materials. The gunmetal housing, the stainless steel spring and
all internal parts made of stainless steel are difficult to beat
in terms of resistance, especially in aggressive waters, salt
water or saline atmospheres. Whether metallically sealing or,
to meet the most stringent tightness requirements, with me-
tallically supported O-ring seal in a diverse range of materials or
with counter-pressure compensating metal bellows, there is an
ideal design for every application.



Temperatures
from +14 °F to +248°F



Pressures
from 7,25 psi to 362,6 psi



Flange connections
1½" and 2"

TÜV/CE safety valves for heating and cooling

SAFETY VALVES WITH BELLOWS SERIES 455bHL

made of stainless steel, angle type with flange connections



In addition to the spheroidal graphite cast iron version, flanged safety valves are also available in high-alloy stainless steel. With metallic-supported elastomer bellows and elastomer seals, these D/G/H safety valves are specially approved for protecting large heating systems in industry and building technology as well as in combined heat and power plants and district heating supply systems. The valves fulfil the requirements of the Swiss SWKI.



Temperatures
from +14 °F to +248 °F



Pressures
from 7,25 psi to 362,6 psi



Flange connections
from ½" to 4"

SAFETY VALVES WITH BELLOWS SERIES 355bHL

made of spheroidal graphite cast iron, angle type with flange connections



The 355 series flanged safety valve impresses with its consistent concept in terms of performance, function and design. The use of cast iron as the housing material creates an especially cost-effective variant. This is particularly beneficial for heating applications and steam, as well as lower requirements for corrosion resistance. The metallically supported, moulded elastomer seal offers safety in the temperature range from -10°C to 120°C.



Temperatures
from +14 °F to +248 °F



Pressures
from 7,25 psi to 362,6 psi



Flange connections
from ½" to 4"

SAFETY VALVES WITH BELLOWS SERIES 255bHL

made of cast steel, angle type with flange connections



The flanged safety valves in the 255bHL series impress with their robust design in cast steel and cover nominal diameters from DN 15 to DN 100. They offer a consistent performance, function and design concept that allows for both vertical and horizontal installation. The low overall height and the option of a full nozzle design make this series particularly easy to maintain. Thanks to the full-metal construction, the valves are also suitable for use at high ambient or radiation temperatures. As a standard-lift safety valve, the 255bHL series is specially designed for protecting closed, thermostatically ensured water heating systems with flow temperatures of up to 120°C and meets the requirements of TRD 721, DIN 4751 and DIN EN 12828 for all static heights or nominal outputs above 350 kW.



Temperatures
from +14 °F to +248 °F



Pressures
from 7,25 psi to 362,6 psi



Flange connections
from ½" to 4"

SAFETY VALVES WITH BELLOWS SERIES 451BHF / 851bHF

made of stainless steel / gunmetal, angle type with threaded connections



These valves fulfil the highest demands on the corrosion resistance of the materials. With stainless steel bellows and metal-supported elastomer seals, these D/G/H and F-approved safety valves can be used to protect heating and cooling systems in industry and building technology. This is a universally applicable safety valve, especially for indirect heating and cooling via heat exchangers. The valves fulfil the requirements of the Swiss SWKI



Temperatures
from -40 °F to +248 °F



Pressures
from 7,25 psi to 362,6 psi



Threaded connections
from ½" to 2"

SAFETY VALVES WITH DIAPHRAGM SERIES 652mFK

made of gunmetal, all-metal construction, angle type with threaded connections



The safety valve with diaphragm version 652mFK-EPDM is especially designed for the protection of closed cooling circuits. This valve, made of corrosion-resistant gunmetal, with an all-metal construction, is resistant for plants and cooling media with a cooling media containing up to 100% glycol. It's unbeatable value for money makes this a standard valve specified in tenders for cooling and air-conditioning plants.



Temperatures
from -58 °F to +302 °F



Pressures
from 14,5 psi to 232 psi



Threaded connections
from ½" to 2"



TÜV/CE SAFETY VALVES FOR SOLAR PLANTS AND DISTRICT HEATING

Materials



Temperatures
from -76°F to +752°F



Pressures
from 7,25 psi to 725 psi

Media



Threaded connections
from ½" to 2"



Flange connections
from ½" to 4"

The safety valves for solar plants are designed and tested for high media temperatures. Even for the SOL-valves for intrinsically safe plants, the materials have been tested up to 320°F.

TÜV/CE SAFETY VALVES FOR SOLAR PLANTS AND DISTRICT HEATING ARE USED HERE:



Solar power plants (collectors)



District heating supply



District heating generation



Solar heating systems (collectors)

TÜV/CE safety valves for solar plants and district heating

SAFETY VALVES WITH DIAPHRAGM SERIES 651mSK

made of gunmetal, angle type with threaded connections



Diaphragm safety valve for protecting small and medium-sized, intrinsically safe solar heating systems. The valve is characterised by a number of special features: Temperature resistance tested up to 320 °F, 100 % metallic and with different connections up to a size of one inch.

The valve is component-tested in accordance with TÜV directives for closed, intrinsically safe solar heating systems with flow temperatures of up to 248 °F. Depending on the connection size, it is suitable for a heating output of up to 200 kW.

- Temperatures**
from +14 °F to +248 °F
- Pressures**
from 29 psi to 145 psi
- Threaded connections**
from ½" to 1"

SAFETY VALVES WITH BELLOWS SERIES 851bG / 852BGL

made of gunmetal, angle type with threaded or flange connections



These high-performance safety valves with bellows are suitable for protecting non-intrinsically safe solar heating systems with temperatures of over 392 °F as well as district heating supply systems, steam boilers and pressurised containers. The metallic bellows protects sliding and moving parts from the medium and thus from dangerous deposits. The spring chamber and spring are protected against penetrating steam and high temperatures.

- Temperatures**
from -76 °F to +437 °F
- Pressures**
from 7,25 psi to 725 psi
- Threaded connections**
from ½" to 2"
- Flange connections**
1½" and 2"

SAFETY VALVES WITH BELLOWS SERIES 451bG / 455bGFL

made of stainless steel, angle type with threaded or flange connections



These highly corrosion- and temperature-resistant stainless steel safety valves from the 451 series with stainless steel bellows fulfil the highest demands in terms of temperature resistance and features. For protecting non-intrinsically safe solar heating systems and district heating supply systems with temperatures above 392 °F.

- Temperatures**
from -76 °F to +752 °F
- Pressures**
from 2,9 psi to 1015 psi
- Threaded connections**
from ½" to 2"
- Flange connections**
from ½" to 4"

SAFETY VALVES WITH BELLOWS SERIES 355bGFL

made of spheroidal graphite cast iron, angle type with flange connections



The safety valve with flanged connections made of spheroidal graphite iron offers ideal protection for non-intrinsically safe solar heating systems with temperatures up to 392°F and above as well as for district heating supply systems, steam boilers and pressure vessels.

The metal bellows protects sliding and moving parts from the medium and thus from dangerous deposits.

In addition, the compression spring and spring chamber are protected against steam penetration and high temperatures. By using spheroidal graphite iron as the body material, this series can be an economical alternative, depending on the application.

- Temperatures**
from +14 °F to +662 °F
- Pressures**
from 2,9 psi to 580 psi
- Flange connections**
from ½" to 4"


Thermal solar systems



Thermal solar systems are technical installations that absorb sunrays, and with the aid of the carrier medium, transport the energy to heating systems or hot water boilers and emit this in a usable form.

Medium temperatures of well over 320°F are usual in larger systems. We talk about an inherently-safe solar heating system when the expansion tank absorbs a thermal volume dilation and compensates for this change in volume by generating steam.

In this process, there is no automatic feed of the heat carrier (medium) and, accordingly, this includes the typical small system located on the roofs of many residential properties.

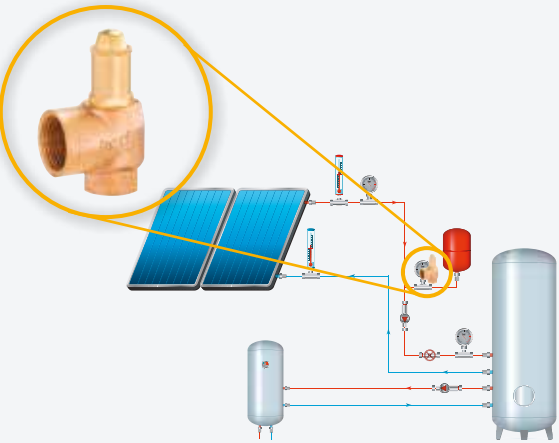

- Type 651mSK with identification code SOL** for closed, intrinsically safe solar heating systems with initial temperatures of up to 248 °F.
- FOR HIGHER TEMPERATURES**

Type 851/451bG and 852bGL/355/455bGFL with EPDM up to 338 °F (↗ glycol mixture) or with PTFE up to 437 °F or for stainless steel versions with a metallic seal up to 752 °F.

CONNECTION POSSIBILITIES

Connection type	Drawing	Description
f		Whitworth male threaded pipe connection cylindrical; seal not made on thread BSP-P according to DIN ISO 228
m		Whitworth male threaded pipe connection cylindrical; seal not made on thread BSP-P according to DIN ISO 228
BSP-Tm		Whitworth male threaded pipe connection tapered; seal made on thread male connection BSP-T according to DIN EN 10226
NPTf		US standard tapered pipe thread NPT female threaded pipe connection NPT according to ANSI / ASME B 1.20.1 seal made on thread
NPTFf		US tapered pipe thread for dry closure NPTF female threaded pipe connection NPTF according to ANSI / ASME B1.20.3 seal made on thread
NPTm		US standard tapered pipe thread NPT male threaded pipe connection NPT according to ANSI / ASME B 1.20.1 seal made on thread
METf		Metric ISO female connection according to DIN 13 seal not made on thread
METm		Metric ISO male connection according to DIN 13 seal not made on thread
FCDxA		FCD = Flange connection moulded to DIN EN 1092 x = Pressure rating PN 1 = PN10; 2 = PN16; 3= PN25; 4 = PN40 A = Standard with sealing strip form B ¹

¹ Other versions of the sealing strip on request.

Connection type	Drawing	Description
FCAxA		FCA = flange connections moulded according to ASME B 16.5 x = Pressure rating / class 1 = Class 150; 2= Class 300 A = Standard with sealing strip raised face ¹
FCBxA		FCB = Cast flange connections according to ASME B 16.24 x = Pressure rating / class 1 = Class 150; 2= Class 300 A = Standard with raised face sealing strip ¹
SE		Welding end SE1 for pipes according to DIN EN ISO 1127 SE2 for pipes according to ASTM A312 S10 SE3 for pipes according to ASTM A312 S40 SE4 for pipes according to DIN 11850 row 2; DIN 11866-A; DIN EN 10357 series A SE5 for pipes according to DIN EN ISO 1127; DIN 11866-B; DIN EN 10357 series C SE6 for pipes according to BS 4825-1; DIN 11866-C
SM		Welding socket SM1 for pipes according to DIN EN ISO 1127 SM2 for pipes according to ASTM A312 S10 SM3 for pipes according to ASTM A312 S40
LM		Soldering socket LM1 for pipes according to DIN EN ISO 1127 LM2 for pipes according to ASTM A312 S10 LM3 for pipes according to ASTM A312 S40 LM4 for pipes according to DIN EN 12449
FLDxA, FLDxB		FLD = loose flange to DIN EN 1092 up to max. PN100 x = Pressure class PN 1 = PN10; 2 = PN16; 3= PN25; 4 = PN40; 5 = PN63; 6= PN100 A = Standard with raised face form B ¹ B = Sealing strip with groove form D ¹
FLAxA, FLAxB		FLA = loose flange according to ASME B 16.5 up to max. 600 lbs x = Pressure rating / class 1 = Class 150; 2 = Class 300; 3 = Class 400; 4 = Class 600 A = Standard with sealing strip raised face ¹ B = Sealing strip with ring joint face ¹
FWDxA		FWD = Welding neck flange according to DIN EN 1092 x = Pressure class PN 1 = PN10; 2 = PN16; 3= PN25; 4 = PN40; 5 = PN63; 6= PN100 A = Standard with sealing strip form B ¹
FWAxA		FWA = Welding neck flange according to ASME B 16.5 x = Pressure rating / class 1 = Class 150; 2 = Class 300; 3 = Class 400; 4 = Class 600 A = Standard with sealing strip raised face ¹

¹ Other versions of the sealing strip on request.

EXPAND YOUR POSSIBILITIES

Discover industrial valves for building services applications

In this brochure, we show you a variety of specially developed valves and pressure reducing valves that are optimised for use in building services applications. But did you know that some of our industrial valves can also play a valuable role in this area?

Industrial valves also offer decisive advantages and high reliability in building services engineering. Our industrial valves have proven to be efficient and safe solutions, particularly in complex pressurised systems, fire extinguishing systems and drinking water supply systems.



Would you like to find out more about the versatile applications of these valves? Simply scan the QR code and you will be taken directly to our 'Industrial brochure', where you will find detailed information on the following valve series:

- Series 417 & 617:**
 Overflow and control valves (pressure maintenance valves), which are ideal for protecting booster pumps and ensuring optimum pressure conditions in drinking water supply systems and fire extinguishing systems.
- Series 630 & 631:**
 Pressure relief and control valves (back pressure valves) with robust threaded and flanged connections, providing precise pressure regulation and high flow rates in water supply and heating systems.
- Series 642 & 645:**
 Safety valves, are perfect for use in pressure vessels and pressurised systems, including heating and air conditioning applications.
- Series 6420, 6450, 851, 652:**
 For specific applications in building services engineering, from the protection of pressure boosting systems to flexible solutions for different media and temperature ranges.





INTERNET SERVICE OF GOETZE

DESIGN AND CALCULATION OF SAFETY VALVES

With the help of a design programme and with the alpha-w value as well as the narrowest flow diameter of our safety valves, the valve suitable for discharging the required volume can be determined according to AD regulation A2-2000, in accordance with the international and European standard DIN EN ISO 4126, API 520 and ASME BPVC-VIII. Our experts offer you competent advice on the optimal and economical sizing of your valve.

3D MODELS AND TENDER DOCUMENTS

We provide free-of-charge our 3D models in various and common formats. On our website you will find them under the section „Service/Download“

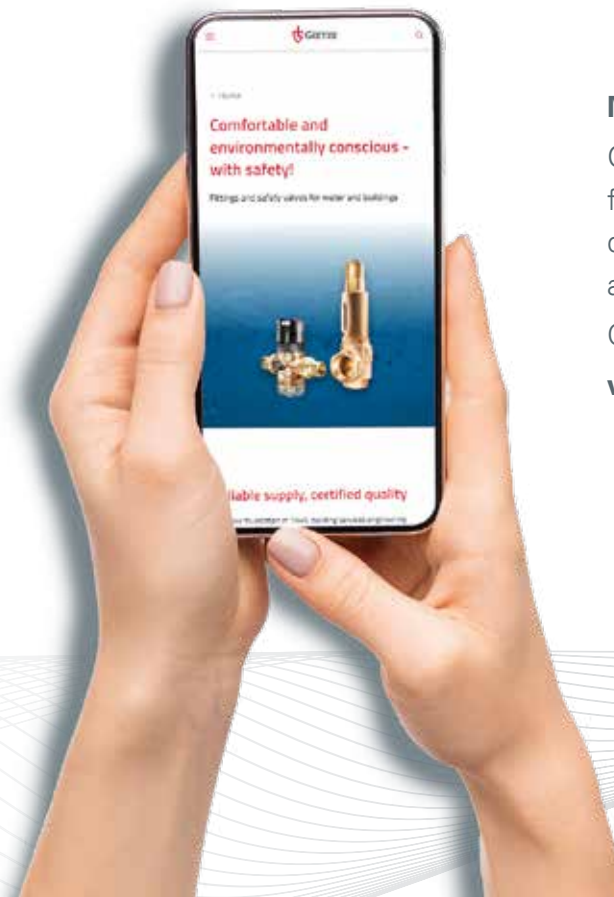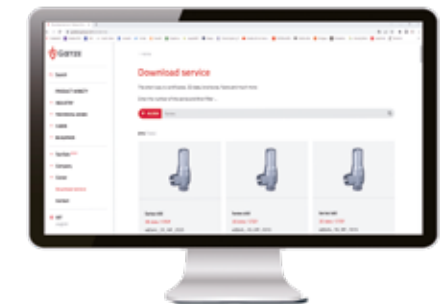

MOBILE WEBSITE

Our website is also available in a version optimised for smart phones. As usual, you may find your products simply and easily – also when you are out and about.

Curious? Just take a look!

www.goetze-group.com

HOW TO HANDLE PRESSURE

The competence of Goetze KG Armaturen has been in demand for more than 70 years. Our wealth of experience is as broad and varied as our areas of applications for our high-performance fittings.

Our products for building technology

CONVENIENT & ENVIRONMENTALLY-CONSCIOUS SAFETY

from a diverse product range – „Made in Germany“

YEARS OF EXPERIENCE

since being founded in 1949

UNCOMPROMISING PERFORMANCE


in the areas of water supply, heating, cooling, district heating and solar plants

7,25 PSI – 580 PSI

extensive pressure range, both for inlet pressure and outlet pressure

Goetze's comprehensive expertise

We support our customers with our many years of experience in this sector at the highest professional level. Thanks to the expertise of our qualified development team, we are able to continuously develop new and innovative products and are able to adapt these to individual customer requirements. Making use of skilled manual labour and precise manufacturing methods, we are able to realize the ideas and product innovations of our customers – customer-focused, solution-oriented, flexible and always in top branded quality „Made in Germany“.

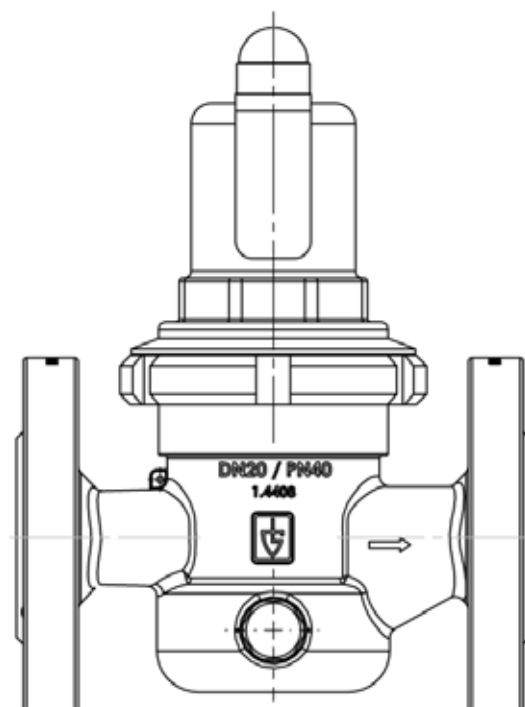

THE GOETZE KG ARMATUREN

Individuality for more safety

The competence of Goetze KG Armaturen has been in demand for 70 years. Our wealth of experience is as broad and varied as our areas of application for our high-performance fittings. Our well thought-out product portfolio covers every industrial application: Liquids of all kinds, gases, technical vapours and steam. Goetze valves are used with temperatures ranging from -454 °F up to +752 °F. The greatest possible safety is a priority.

PROFESSIONAL AND COMPETENT ADVICE

At any time, you can reach a competent contact partner as part of our in-house team at Goetze. Whether it is for the product selection, the configuration of the right valve, urgent requests, whether per telephone call or per mail, there is a personal multilingual consultant at your disposal. With our valves and fittings - "Made in Germany" - we are your competent partner for all matters relating to the handling of pressure.

Technical consulting is not only the focus of our in-house team. We provide support for our customers with the necessary information and instructions throughout the entire life cycle of the valve thereby assisting those persons who have to work with the fittings every day. Our field representatives are tasked with providing customers with the best possible consultation service at the customer's facility and supporting them in all questions concerning our products.

GLOBAL TRADE

Goetze products – available worldwide, directly and quickly. No matter whether through Goetze or our trading partners. Our sales subsidiaries and local dealers will always provide the advice you need to find the product that suits you best. Discover our dealer network and find your local dealer.

NOTES

NOTES



Goetze Valves NA, Inc.

9499 Old Bailes Road
Suite 216, Fort Mill, SC 29707
Fon: +1 (980) 422-3305
www.goetze-group.com
order@goetze-valves.com

Headquarter

Goetze KG Armaturen
Ludwigsburg, Germany